


NF ELIT HEXA

KEY BENEFITS

100% BIRCH PLYWOOD COATED WITH SLIP-RESISTANT MATERIAL WITH HEXAGONAL PATTERN FOR MAKING FLOORS IN LIGHT COMMERCIAL VEHICLES AND OTHER FLOORING APPLICATIONS WHERE EASY CARE AND BEAUTIFUL APPEARANCE ARE VALUED: WAREHOUSES, PLAY AND SPORTS GROUNDS, CONCERT VENUES, ETC.

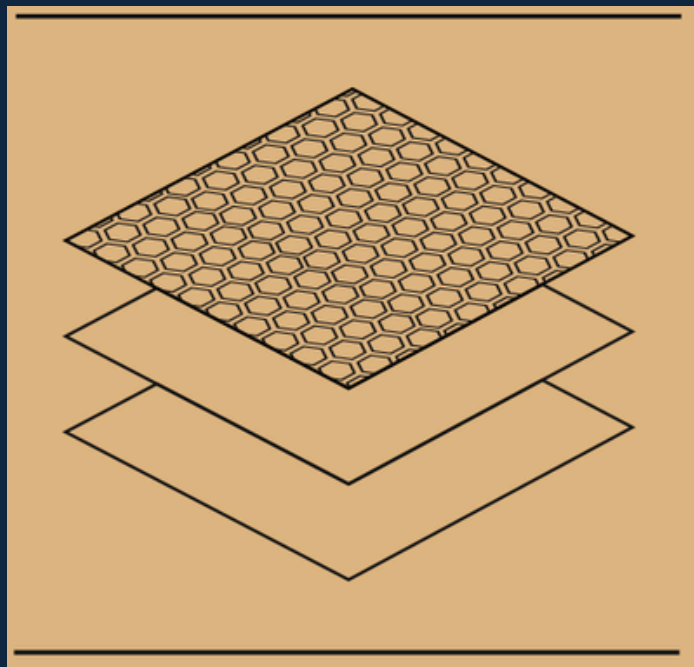

100% BIRCH PLYWOOD
FOR LIGHT COMMERCIAL
VEHICLE FLOORING

Phone / WhatsApp:

(513) 255-3103


Email:

sales@nfelitwood.com



EASY CARE

RAISED
HEXA PATTERN



RESISTANT
TO WEAR



EXCELLENT WEAR
RESISTANCE

TABER VALUE 350R-600R



R10 ANTI-SLIP RATING

ANTI-SLIP



EASY CARE



CHOICE OF COLORS

Anti-Slip • Durable • Ready for Hard Work

Key Features

- 100 % birch core for high strength
- Hexagonal phenolic film, R10 anti-slip Taber wear resistance 350 – 600 cycles Easy-clean, waterproof surface (WBP glue)
- Low formaldehyde – CARB P2 / TSCA VI/ E1

Available Colors

Dark Brown • Black • Light Gray • Stone Gray

Sizes & Thicknesses

- 4 × 8 ft • 5 × 10 ft • 5 × 5 ft (1220×2440 mm, 1525×3050 mm, 1525×1525 mm)
- Standard thickness: ½” – 1 ¼” (12 – 30 mm). Up to 1.57” (40 mm) on request

Typical Applications

Light commercial vehicle floors Warehouse and stage decks Sports & play flooring

TECHNICAL SPECIFICATIONS & COMPLIANCE

Mechanical Properties*

- Static bending – Modulus of Rupture: 8.7 ksi along / 4.4 ksi across (60 / 30 MPa)
- Modulus of Elasticity: 870 ksi along / 435 ksi across (6000 / 3000 MPa)
- Density: 40 – 44 lb/ft³ (640 – 700 kg/m³)
- *Typical values on ¾” (18 mm) panels.

Bonding


Phenol-formaldehyde WBP (exterior) per PS 1-09.

Quality & Safety

- Thickness tolerance ±0.008 in (±0.2 mm)
- Moisture 5 – 12 % Face / back: Hexa pattern / smooth (S2S sanded)
- Emission class ≤ 0.05 ppm (CARB P2)

Packaging & Logistics

Plastic-film wrapped bundles ISPM-15 heat-treated pallets Bar-coded bundle tally sheets

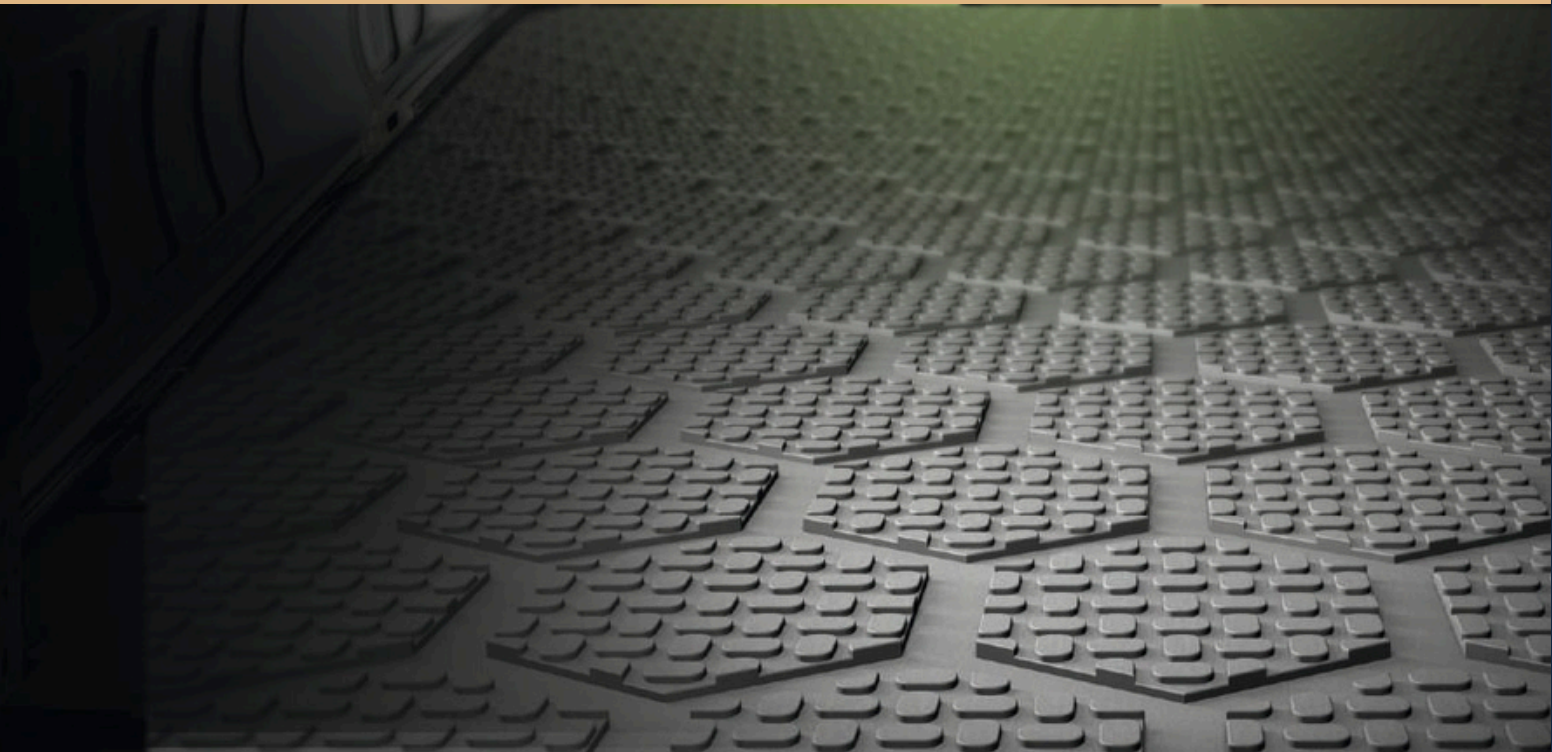

APPLICATIONS



Flooring for light commercial vehicles



Stage floors and sets



Industrial floors



Flooring for boats and yachts



Flooring for sea containers



Flooring for small vessels